


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz    n= 2900 rpm    HS= 0 m

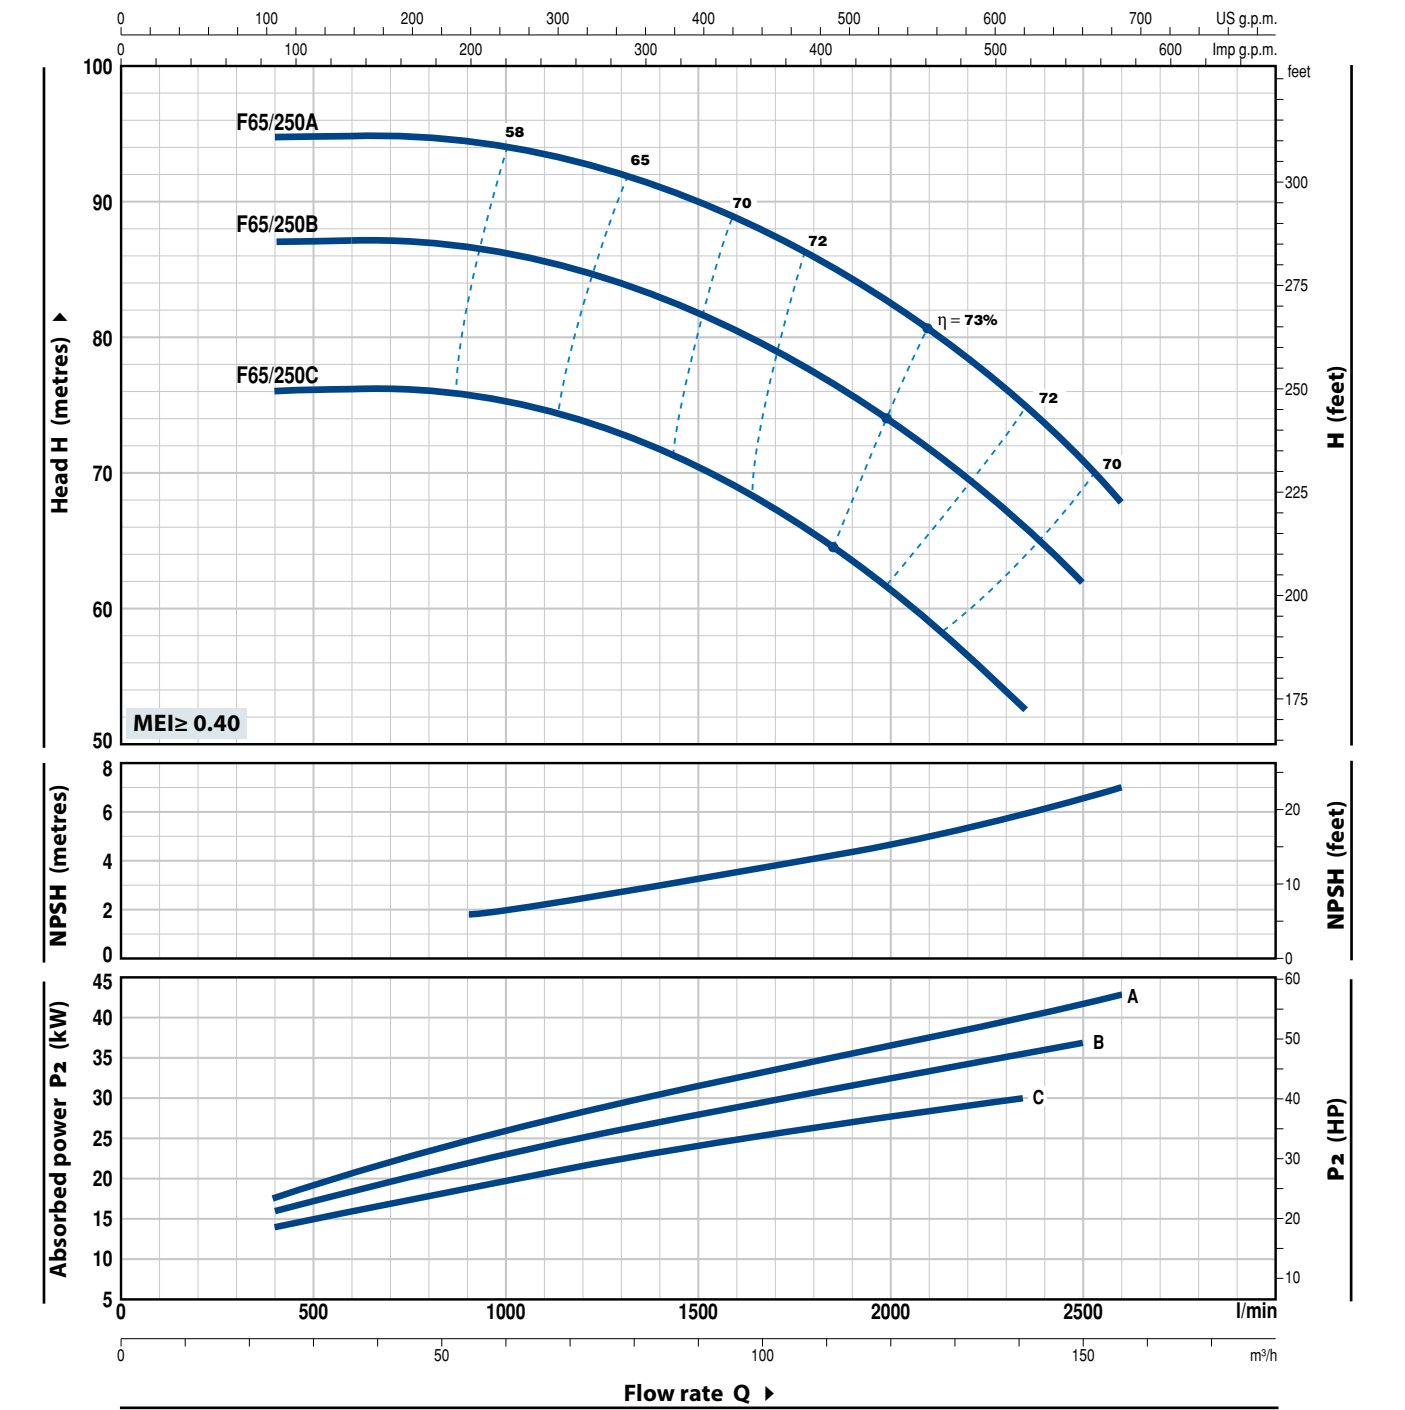

| MODEL     | POWER (P <sub>2</sub> ) |    | Q        | 24  | 40  | 60   | 80   | 100  | 120  | 141  | 150  | 156  |
|-----------|-------------------------|----|----------|-----|-----|------|------|------|------|------|------|------|
|           | kW                      | HP |          | 400 | 667 | 1000 | 1333 | 1667 | 2000 | 2350 | 2500 | 2600 |
| F 65/250C | 30                      | 40 | H metres | 76  | 76  | 75.5 | 72.5 | 68   | 61.5 | 53   |      |      |
| F 65/250B | 37                      | 50 |          | 87  | 87  | 86   | 84   | 80   | 74   | 66.5 | 62   |      |
| F 65/250A | 45                      | 60 |          | 95  | 95  | 94   | 92   | 88   | 82.5 | 75   | 71   | 68   |

Q = Flow rate    H = Total manometric head    HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.